

## 7. 3G/3.5G Mobile Phone/PDA Support

To streaming from 3/3.5G mobile phone or PDA, you have to open the mobile port of DVR, the default setting is 7050, which may be changed, please refer to [5.5.5 PPPoE/DDNS\(Net-Second Page\]](#) or IE [6.5 Device Parameters Settings](#) Server→Network setting, video system

For limited upload bandwidth of internet that DVRs connect, or limited streaming capability of some mobile phone/PDA, you have to adjust bandwidth of DVR to internet, please refer to [5.3.8 Dual Streaming for Network\(Record- Advanced Setting\)](#) or [6.5 Device Parameters Settings - Channel→ Camera setting, Sub Bitstream, Subcode](#) (from IE) for more details


You may find the Windows Mobile 5.0/6.0/6.1 PDA(**amplayersetup.CAB**) and Symbian S60 3<sup>rd</sup> (**P2P\_S60\_3rd\_0113.sis**) and S60 5<sup>th</sup>(**P2P\_S60\_5Th\_20090112.sis**) softwares from the CD inside the DVR package or visit your DVR website to download by IE – <http://xxx.xxxx.xxx/download.html>

Note: User’s mobile phone must apply internet connection service at first, such as 3G or 3.5G service. Please contact mobile company for detail.

### 7.1 Windows Mobile PDA

Open accessory CD and find the “**amplayersetup.CAB**” for the surveillance software. Please refer to PDA user manual, copy \*.cab into windows mobile pda Double click on \*.cab can start install software into PDA. After install completed, user can find QQEYE in the application list.

Execute QQEYE program and click  to setup IP address of remote DVR.

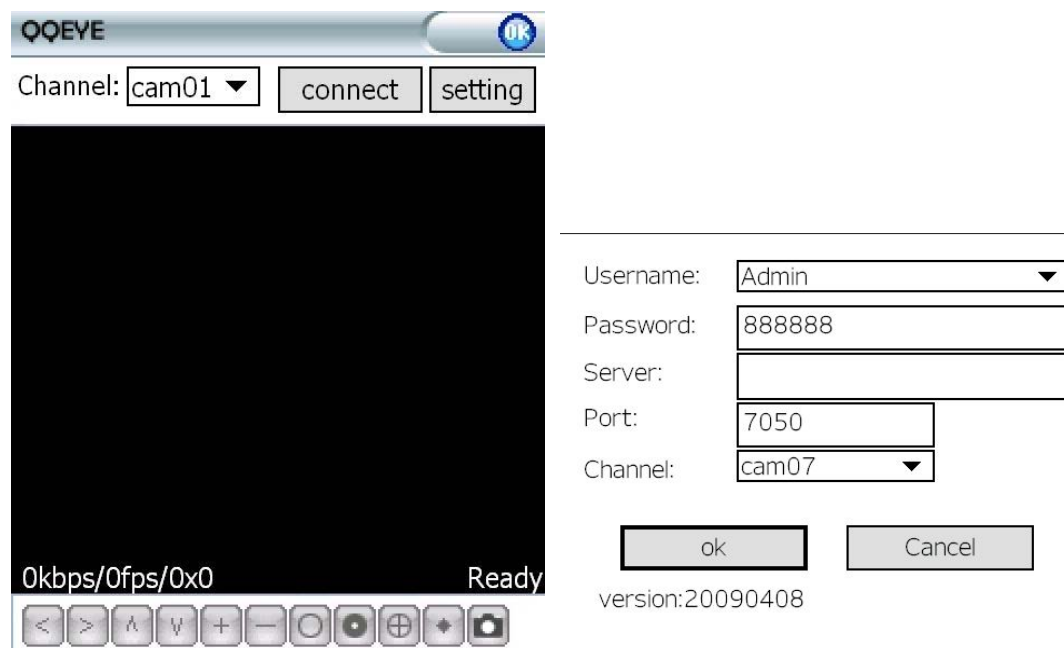



Input user name [Admin] and password. IP address of DVR and port:7050 for streaming data.

Click ok to save the setting.


In the main windows, click “connect” to login DVR and watch the steaming video from DVR.

At the bottom is the PTZ control and picture snapshot.

## 7.2 Nokia/Samsung/LG Symbian S60 3<sup>rd</sup>/S60 5<sup>th</sup> Phones

Open accessory CD and find the “P2P\_S60\_3rd\_0113.sis” or “P2P\_S60\_5Th\_20090112.sis” mobile surveillance software according to Symbian OS S60 3<sup>rd</sup> or 5<sup>th</sup>. Please refer to user manual of mobile phone to install the software into mobile phone.

**While install the software, must set “software installation -ALL”, and “Online Certificate check - off”, ex. Main menu --> Applications --> App. mgr. (application management) --> Options --> settings --> software installaion ,set ALL --> Online Certificate check , set off**

After installation completed, user can find the QQEYE  icons at the application list. Execute QQEYE, First step is configuring the IP address of DVR, username, password.

Click  icon to show the setup windows,

Server Address: DVR IP address


Server Port:: 7050

Username: [Admin]

Password: By default are 888888

Save and return to main windows



Click  icon to connect DVR immediately, after login DVR successfully, user can watch the remote video from mobile phone.



switch channel , click  show another 4 channel list



Control PTZ camera direction, Zoom, Focus. , Iris.



Picture Snapshot.



Exit QQEYE


### Mobile phone reference list:

Nokia 5730 XpressMusic	S60 3rd_FP2	11-Mar-09
Nokia N86 8MP	S60 3rd_FP2	17-Feb-09
Nokia E55	S60 3rd_FP2	16-Feb-09
Nokia E75	S60 3rd_FP2	16-Feb-09
Nokia 6710 Navigator	S60 3rd_FP2	16-Feb-09
Nokia 6720 Classic	S60 3rd_FP2	16-Feb-09
Nokia 5630 XpressMusic	S60 3rd_FP2	10-Feb-09
Nokia E63	S60 3rd_FP1	12-Nov-08
LG-KT615	S60 3rd_FP1	30-Oct-08
Samsung I7110	S60 3rd_FP2	20-Oct-08
Nokia N79	S60 3rd_FP2	21-Aug-08
Nokia N85	S60 3rd_FP2	21-Aug-08
Samsung INNOV8	S60 3rd_FP2	25-Jul-08
Nokia E66	S60 3rd_FP1	16-Jun-08
Nokia E71	S60 3rd_FP1	16-Jun-08
Samsung SGH-L870	S60 3rd_FP2	28-May-08
Nokia 5320 XpressMusic	S60 3rd_FP2	22-Apr-08
Samsung SGH-G810	S60 3rd_FP1	11-Feb-08
Nokia 6220	S60 3rd_FP2	11-Feb-08
Nokia N78	S60 3rd_FP2	11-Feb-08
Nokia N96	S60 3rd_FP2	11-Feb-08
Nokia 6210 Navigator	S60 3rd_FP2	11-Feb-08
LG-KT610	S60 3rd_FP1	10-Feb-08
Nokia N82	S60 3rd_FP1	14-Nov-07
Samsung SGH-i560	S60 3rd_FP1	16-Oct-07
Samsung SGH-i550	S60 3rd_FP1	15-Oct-07
Samsung SGH-i450	S60 3rd_FP1	14-Oct-07
Nokia E51	S60 3rd_FP1	18-Sep-07
Nokia N95 8GB	S60 3rd_FP1	29-Aug-07
Nokia N81	S60 3rd_FP1	29-Aug-07
Nokia N81 8GB	S60 3rd_FP1	29-Aug-07
Nokia 6121	S60 3rd_FP1	18-Jun-07
Samsung SGH-i400	S60 3rd_FP1	26-Apr-07
Nokia 6120	S60 3rd_FP1	17-Apr-07
Nokia 5700	S60 3rd_FP1	29-Mar-07
Nokia N77	S60 3rd_INIT	12-Feb-07
Nokia E90	S60 3rd_FP1	11-Feb-07
Nokia E61i	S60 3rd_INIT	10-Feb-07
Nokia E65	S60 3rd_INIT	09-Feb-07
Nokia 6110 Navigator	S60 3rd_FP1	08-Feb-07
Nokia N76	S60 3rd_FP1	08-Jan-07
Nokia N93i	S60 3rd_INIT	08-Jan-07
Nokia 6290	S60 3rd_FP1	28-Nov-06
LG KS10	S60 3rd_FP1	09-Oct-06
Samsung SGH-i520	S60 3rd_FP1	09-Oct-06
Nokia N75	S60 3rd_INIT	27-Sep-06
Nokia N95	S60 3rd_FP1	26-Sep-06
Nokia E62	S60 3rd_INIT	09-Sep-06
Nokia 5500 Sport	S60 3rd_INIT	09-May-06
Nokia N93	S60 3rd_INIT	09-Apr-06
Nokia N73	S60 3rd_INIT	09-Apr-06


Nokia N92	S60 3rd_INIT	09-Nov-05
Nokia N71	S60 3rd_INIT	09-Nov-05
Nokia N80	S60 3rd_INIT	09-Nov-05
Nokia E70	S60 3rd_INIT	09-Oct-05
Nokia E61	S60 3rd_INIT	09-Oct-05
Nokia E60	S60 3rd_INIT	09-Oct-05
Nokia 3250	S60 3rd_INIT	13-Sep-05
Nokia N91	S60 3rd_INIT	14-Apr-05


















**Symbian OS S60 5<sup>th</sup> Mobile Phone – Nokia 5800XM, N97, 5230, 5802XM, 5530XM and x6**

**7.3 3G/3.5G iPhone Series**

Please use 2<sup>nd</sup> generation iPhone and go to their App Store, search the “APlayer”, download and install it, it is free; Execute APlayer program and click  to setup IP address of remote DVR as below right screenshot  
 Server IP: DVR IP address  
 Port: 7050 by default  
 Username: [Admin]  
 Password: By default are 888888  
 Save and back to main windows



Click  icon to connect DVR immediately, after login DVR successfully, user can watch the remote video from mobile phone; the other icons function are as follows:

-     switch channel , click  show another 4 channel list
-           Control PTZ camera direction, Zoom, Focus, Iris.
-  Picture Snapshot.
-  Full Screen